




Technical Data

Floor Standing Dome Lid Waste Receptacle
B2300

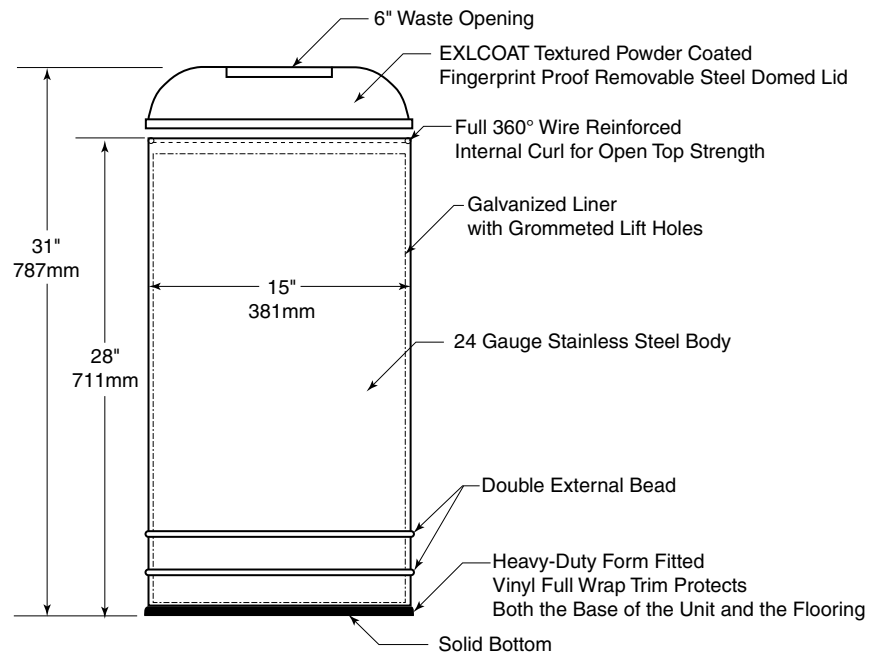

MATERIALS:

Waste Receptacle — Floor-standing cylinder with solid bottom. Exposed surface has satin-finish.

Dome-Lid — Black powder coated steel 15" (381mm) diameter, 22 gauge (0.8mm) with 6" (150mm) diameter opening.

Waste Container — Galvanized steel with grommated lift holes. Removable for servicing. Capacity: 18-gal. (68.1-L).

OPERATION:

Dome lid lifts off waste receptacle for servicing. Wide opening provides hygienic, no-touch waste disposal.

Designer's Note: This unit is not suitable for outside use.

SPECIFICATION:

Floor-standing waste receptacle shall be stainless steel with satin-finish. Waste receptacle shall have a solid bottom with a heavy-duty form fitted vinyl full wrap trim, a double external bead and a removable black steel dome-lid. Dome-lid shall have a 6" (150mm) diameter opening. Unit shall be furnished with a removable, galvanized-steel waste container that has a capacity of 18-gal. (68.1-L). Manufacturer's service and parts manual shall be provided to the building owner/manager upon request.

Floor-Standing Dome-Lid Waste Receptacle shall be Model B-2300 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 12/08